

# NUFORS-CR

## Pneumatically operated level sensed condensate drain

### PRODUCT FEATURES

The NUFORS-CR removes all types of condensate from compressed air systems up to 100 m<sup>3</sup>/min. without the requirement of electricity.

The NUFORS-CR removes condensate from compressed air systems without using electricity.

The discharge process is automatic and is based on a newly developed 3/2 way level controlled valve principle that operates a piston type direct acting valve.

The NUFORS-CR is ideally suited in applications where power is not available, too expensive or not reliable.

The integrated stainless steel strainer protects the valve, optimising the discharge performance.



### COMMERCIAL BENEFITS

- Suitable for any type of compressed air system
- No electricity required – install and go
- No operating costs
- Competitive ‘true green’ solution
- Reduced stocking costs - 1 model covers 100 m<sup>3</sup>/min.
- No complicated sizing charts required
- Consult JORC for private labelling options


### TECHNICAL ADVANTAGES

- Compact and unique design
- Incredibly easy and quick to install and service
- No complicated external control air balance line required
- Integrated mesh strainer
- Top- and side inlets available
- TEST button feature for routine testing
- Robust corrosion resistant aluminium housing
- Direct acting valve construction for a reliable condensate discharge operation
- Successful draining of, even heavily emulsified, condensate due to large 6 mm valve orifice

# NUFORS-CR

Pneumatically operated level sensed condensate drain

## DIMENSIONS

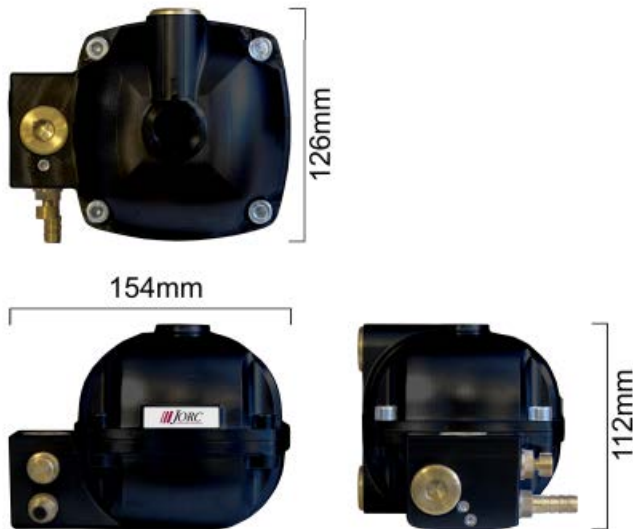

Integrated mesh strainer protects the valve against large contaminants



Three inlet options for easy installation



TEST button feature for routine testing

## TECHNICAL SPECIFICATIONS

Max. compressor capacity	100 m <sup>3</sup> /min.
Max. drainage capacity	1062 litres condensate p/hour at 16 bar
Min./max. system pressure	3 - 16 bar
Min./max. medium temperature	1 - 50 °C
Min./max. ambient temperature	1 - 50 °C
Inlet connection	1/2" BSP or NPT, 3 inlet options
Inlet height	11,2 cm (top) and 9,7 & 1,5 cm (side)
Outlet connection	1/4" BSP
Valve type	Direct acting
Valve orifice	6 mm
Valve seals	FPM
Serviceable valve	Yes
Integrated mesh strainer	Yes
Housing material	Corrosion resistant aluminium, EP coating
TEST feature	Yes
Environmental Protection	IP68 (NEMA 6)



**JORC is NEN - EN - ISO 9001:2015 certified**

Information provided herewith is believed to be accurate and reliable. However, no responsibility is assumed for its use or for any infringement of patents or rights of others, which may result from its use. In addition, JORC reserves the right to revise information without notice and without incurring any obligation.

**JORC Industrial BV**  
 Pretoriastraat 28  
 NL-6413 NN Heerlen  
 The Netherlands

Tel +31 45 5242427

info@jorc.nl  
 www.jorc.eu

